

# CIFAMOOVE 30





## Technical data


### CIFAMOOVE 30

### SPECIFICATIONS

Mixer model and type	PNA 0.5 planetary
Mixer output (m <sup>3</sup> /cycle)	0.5
Plant output (m <sup>3</sup> /h)	30
Aggregate storage capacity (m <sup>3</sup> )	4 x 8
Cement silos	up to 2
Cement screw conveyors diameter (mm)	219
Mixer feeding system	inclined belt
Automation system	CIFAWIN
Water dosing system (l)	240 by weight
Cement dosing system (kg)	320 by weight
Additive dosing system	8 + 8 by weight
Aggregate loading system	ramp or inclined belt
Mixing unit dimensions (mm)	12020 (l) x 2570 (h) x 2290 (w)
Aggregate unit dimensions (mm)	12020 (l) x 2570 (h) x 2290 (w)

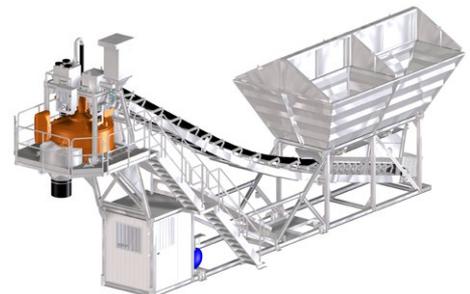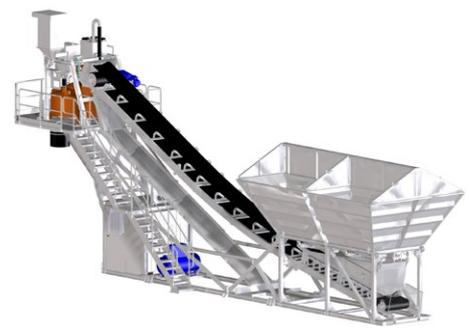

# CIFAMOOVE 30

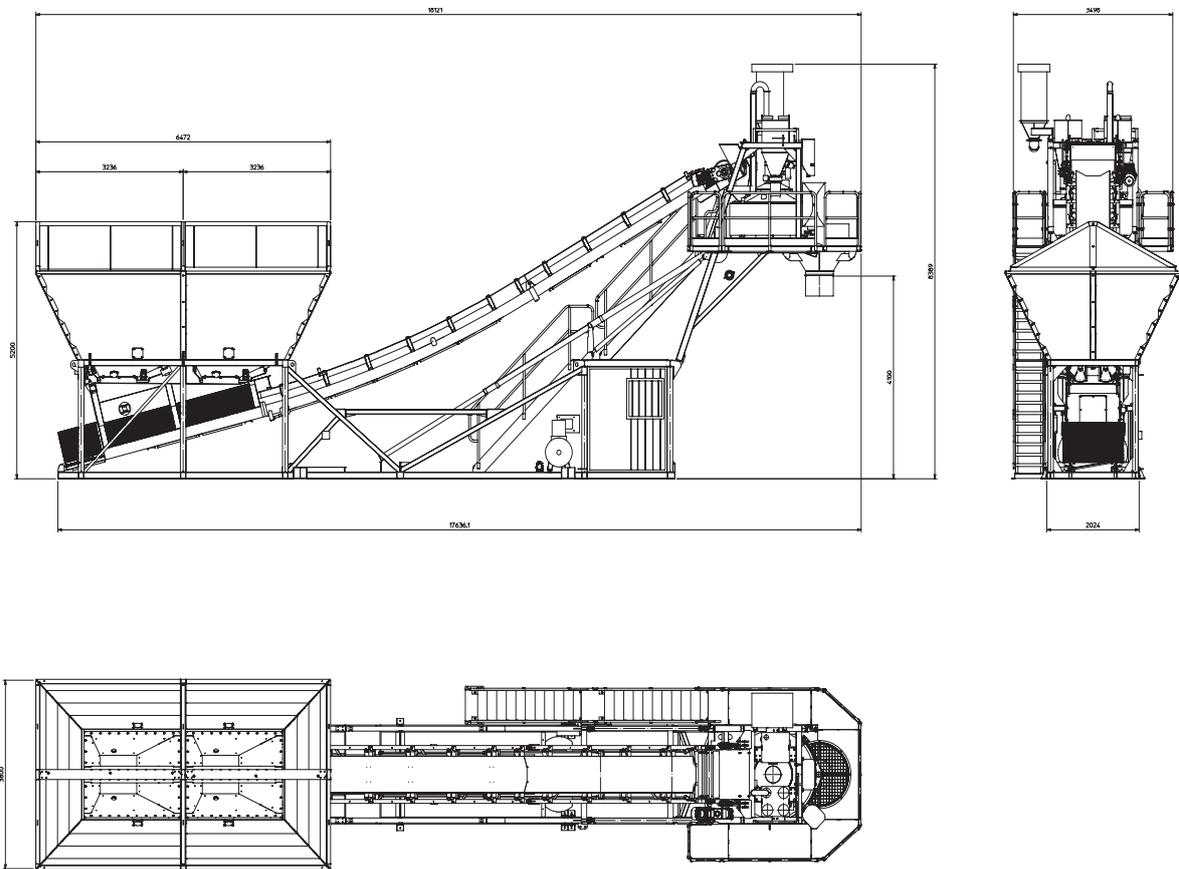

## Standard equipment

- PNA 0.5 planetary mixer (2 mixing paddles and 1 scraping arm)
- Aggregate containing walls 32 m<sup>3</sup>
- Additive dosing system 8 l + 8 l
- Air compressor
- On-board control cabin
- CIFAWIN automation system
- Electric board

## Main options

- Mixer de-dusting system
- Moisture probes (micro-wave or capacitive type)
- Mobile containing walls for ramps made of steel
- On-ground cement silos

Technical data and characteristics subject to modifications without notice



CIFA S.p.A.  
via Stati Uniti d'America, 26  
20030 Senago (Milano) - Italia  
tel.: +39.02.990131 - fax: +39.02.9981157  
www.cifa.com

